




DIN F15 NON-RISING STEM GATE VALVE

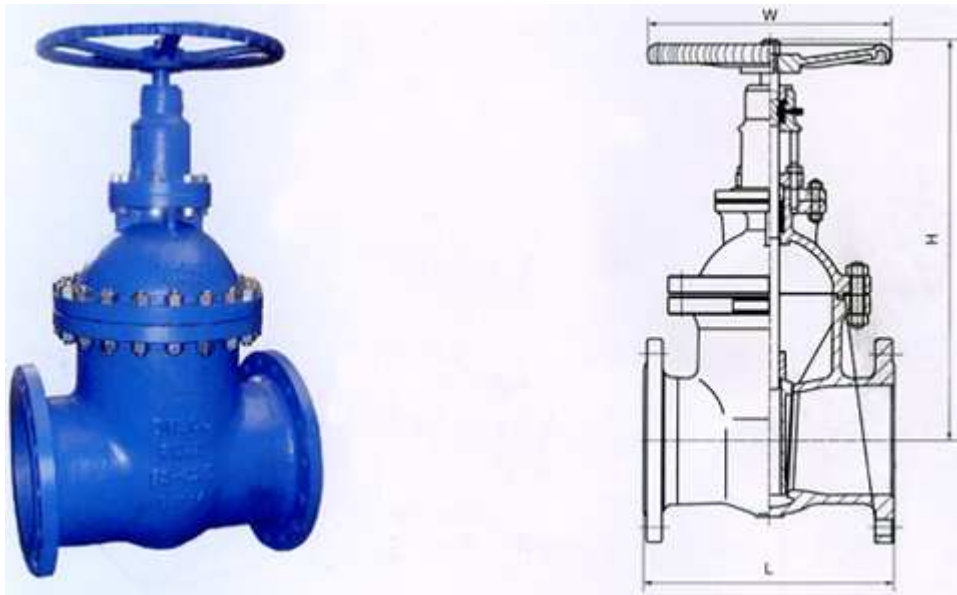

Features:

DIN F15 NON-RISING STEM GATE VALVE

Technical specification

Structural Formation	BB-BG-OS & Y
Driving Manner	Hand-Operated
	Electric-Actuated
Design Standard	DIN3352
Face to Face	DIN3202
Flange Ends	DIN2543-2547
Test & Inspection	DIN3230

Notes: The size of serial, valve connecting flange can be design according to customers requirment.

Products performance specification

Nominal Pressure (Mpa)	Shell Test(Mpa)	Sealing Test(Mpa)	Suitable Temp(oC)	Suitable Medium
1.6	2.4	1.76	110-600 oC	Water Oil & Gas



2.5	3.75	2.75		
4.0	6.0	4.4		
6.4	9.6	7.04		

Main Dimensions

unit:mm

Pressure (Mpa)	PN 1.6 Mpa										
	Size	50	65	80	100	125	150	200	250	300	350
L	250	270	280	330	360	390	460	530	630	690	750
H	305	354	402	437	496	541	699	815	914	1189	1350
W	200	200	250	250	300	350	400	450	500	550	600
Weight(kg)	20	30	38	56	75	100	182	278	398	500	618

Pressure (Mpa)	PN 2.5 Mpa										
	Size	50	65	80	100	125	150	200	250	300	350
L	250	270	280	330	360	390	460	530	630	690	750
H	325	363	415	453	505	556	744	864	948	1269	1450
W	200	200	250	300	350	400	450	500	550	600	600
Weight(kg)	20	30	39	58	80	101	190	290	405	510	650

Pressure (Mpa)	PN 4.0 Mpa										
	Size	50	65	80	100	125	150	200	250	300	350
L	250	270	280	330	360	390	460	530	630	690	750
H	325	370	430	480	532	589	783	888	965	1285	1512
W	200	200	250	300	350	400	450	500	550	600	600
Weight(kg)	22	31	41.5	61	83	110	210	318.5	430	520	680