





**DIN F4 RISING STEM GATE VALVE**

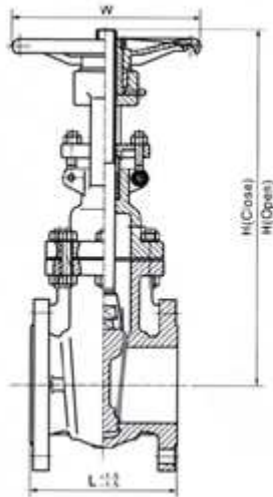

Features:

**DIN F4 RISING STEM GATE VALVE**

**Technical specification**

Structural Formation	BB-BG-OS & Y
Driving Manner	Hand-Operated
	Electric-Actuated
Design Standard	DIN3352
Face to Face	DIN3202
Flange Ends	DIN2543-2547
Test & Inspection	DIN3230

Notes: The size of serial, valve connecting flange can be design according to customers requirment.

**Products performance specification**

Nominal Pressure (Mpa)	Shell Test(Mpa)	Sealing Test(Mpa)	Suitable Temp(oC)	Suitable Medium
1.6	2.4	1.76	-110~600 oC	Water Oil & Gas
2.5	3.75	2.75		
4.0	6.0	4.4		



6.4	9.6	7.04		
-----	-----	------	--	--

**Main Dimensions**

**unit:mm**

Pressure (Mpa)	PN 1.6 Mpa													
	Size	50	65	80	100	125	150	200	250	300	350	400	450	500
L	150	170	180	190	200	210	230	250	270	290	310	330	350	390
H	305	354	402	437	496	541	699	815	914	1189	1350	1680	1907	2050
W	200	200	250	250	300	350	400	400	450	450	500	500	600	600
Weight(kg)	15	17	23	43	51	68	105	176	285	356	568	702	895	1045

Pressure (Mpa)	PN 2.5 Mpa													
	Size	50	65	80	100	125	150	200	250	300	350	400	450	500
L	150	170	180	190	200	210	230	250	270	290	310	330	350	390
H	325	363	415	453	505	556	744	865	948	1269	1450	1680	1907	2050
W	200	200	250	300	350	400	450	500	550	600	600	600	600	600
Weight(kg)	20	30	39	58	80	101	190	290	405	510	650	702	895	1045