




Y TYPE PISTON CHECK VALVE 800LB

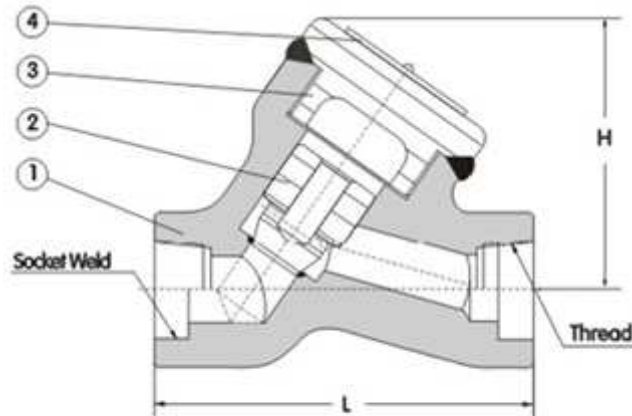

Eg.FIG.YC8P1Y

Features:

**Y-Pattern Piston Check Valve 800Lb**

**Standard Material Specifications**

NO.	Part Name	CS to ASTM	AS to ASTM	SS to ASTM	
		Type A105	Type F22	Type F304(L)	Type F316(L)
1	Body	A105	A182 F22	A182 F304(L)	A182 F316(L)
2	Piston Disc	A276 420	A276 304	A276 304(L)	A276 316(L)
3	Bonnet	A105	A182 F22	A182 F304(L)	A182 F316(L)
4	Nameplate	SS			
Suitable Medium		W.O.G.etc	W.O.G.etc	HNO <sub>3</sub> ,CH <sub>3</sub> OOH etc	
Suitable Temperature		-29~425	-29~550	-29~180	

**Note:** Other materials are available upon request.

**Dimensions (mm) and Weights (Kg)**

NPS	Conv.	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	
	Full		3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
L		98	98	110	120	140	140	170	200



H(OPEN)	85	85	95	105	114	114	132	145
Weights	3.1	3.0	3.7	6.5	8.5	8.0	10.9	12.5